


Thermoelectric chiller



**For laser
and
machining industry**

- External thermometer supplied for setting desired temperature directly at heat source
- Interlock output stopping the external device in case of cooling problem detected
- Cooling and heating capability
- Integrated carry handle
- Switchable Celsius/Fahrenheit scales
- Low noise and vibration
- Matching water connectors provided

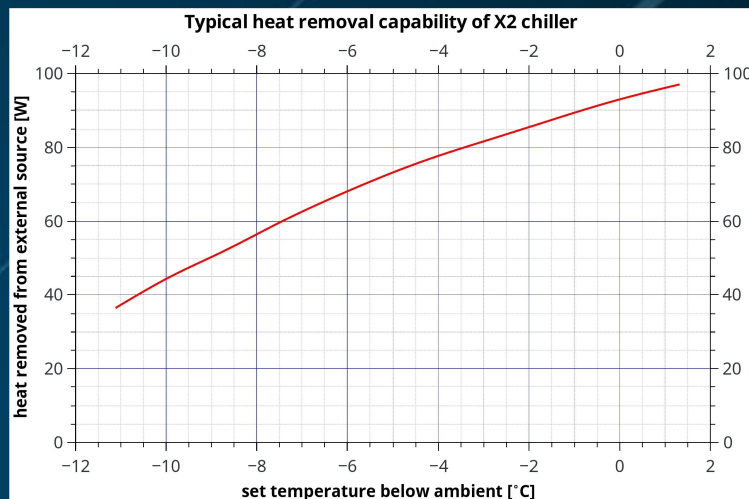

Model	X2
Cooling capacity at $\Delta T=0$	>90 W
Flow rate	4 l/min
Temperature range	10-50°C (50-122°F)
Temperature stability	$\pm 0.1^\circ\text{C}$
Input voltage	100-240 V _{AC} , 50/60 Hz
Input power	<210 W
Dimensions	42 x 33 x 23 cm
Weight	10.8 kg